



LPG Internal Relief Valve is designed for pressure ranges from 6.9 to 23.5 Bar. Contact parts are made of 304/316 stainless steel. Install Teflon seals as standard.

Fitting Details

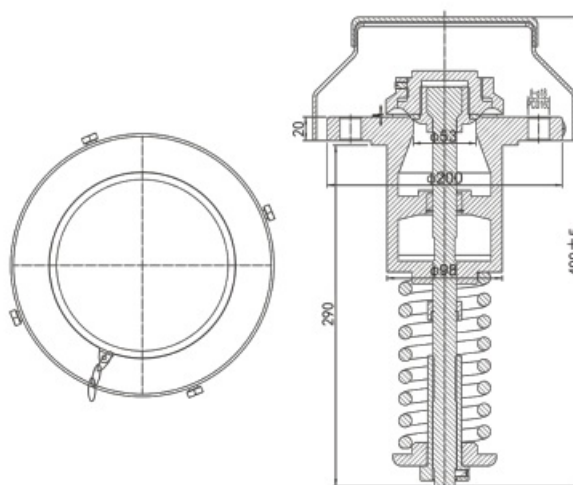

Part No. : AF8007400001
 Connection: Flange 8 × φ 18 × PCD160
 Nominal Diameter: DN80
 Nominal Pressure: PN40
 Design Temperature: - 55°C ~ 80°C
 Contact Parts: 316/304
 Seal: R-PTFE

Part Drawing

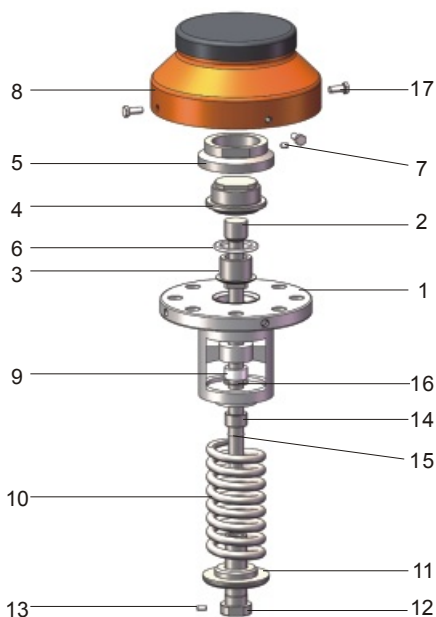

Item	Part No.	Description
1	AF8007400002-01	Body
2	AF8007400002-04	Spindle
3	AF8007400002-03	Solid Poppet
4	AF8007400002-02	Solid Poppet
5	AF8007400002-05	Recoil Shield
6	AF8007400002-09	Seal
7	85998000M6*10	Nut
8	AF8007400002-07	Cover Assembly
9	AF8007400002-08	Bush
10	XXXXXXX	Spring Assembly
11	AF8007400002-06	Spring Pedestal
12	AF8034480001-17	Nut
13	85998000M6*12	M6x12 Nut
14	AF8034480001-12	Height Limit Tube
15	AF8034480001-13	Ring
16	8598150030	Jump Ring
17	85983300M8*25	M8x25 Bolts