



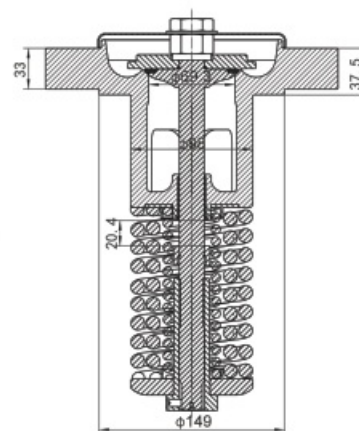


LPG Internal Relief Valve(Full Flange) is designed for pressure ranges from 6.9 to 23.5 Bar. Contact parts are made of 304/316 stainless steel. Install Teflon seals as **standard**.

Fitting Details

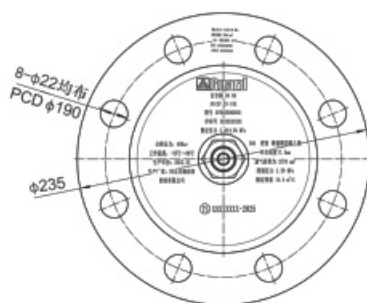

Part No.: AF8020900001
 Connection: Flange 8 × $\phi 22 \times$ PCD190
 Nominal Diameter: DN80
 Nominal Pressure: PN40
 Design Temperature: $-55^{\circ}\text{C} \sim 80^{\circ}\text{C}$
 Contact Parts: 316/304
 Seal: R-PTFE

Part Drawing

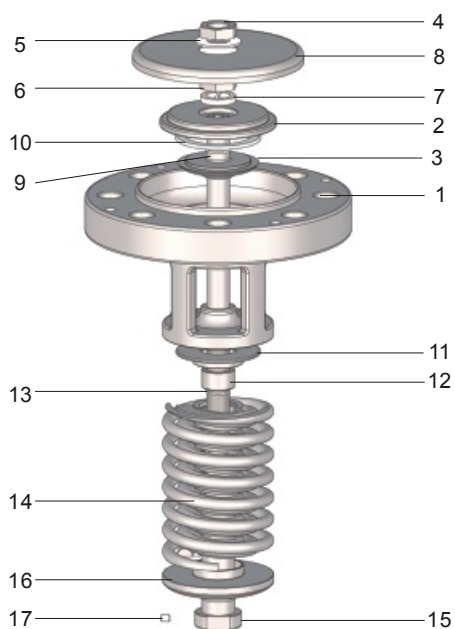

Item	Part No.	Description
1	AF8018500001-01-00	Body Assembly
2	AF8034480001-02	Packing Gland
3	AF8018500001-04	Solid Poppet
4	85984600M20	M20X1.5 Nut
5	AF8034480001-05	Gasket
6	AF8034480001-06	M20x1.5 Nut
7	8598130020	Gasket
8	AF8034480001-07	Cap
9	8559000019*1.8	$\phi 19 \times \phi 1.8$ O-ring
10	AF8034480001-08	Main Seal
11	AF8034480001-10	Spring Seat
12	AF8034480001-12	Height Limit Tube
13	AF8034480001-13	Ring
14	XXXXXXXXXX	Spring Assembly
15	AF8034480001-17	Nut
16	AF8020900001-02	Spring Pedestal
17	85998000M6*12	M6x12 Nut