


3" offshore tank bottom discharge -3" 90° extended foot valve + DN65 dry joint +DN65 dustproof cover assembly , applied to offshore tank, installed at the bottom of the tank, easy to discharge all goods.

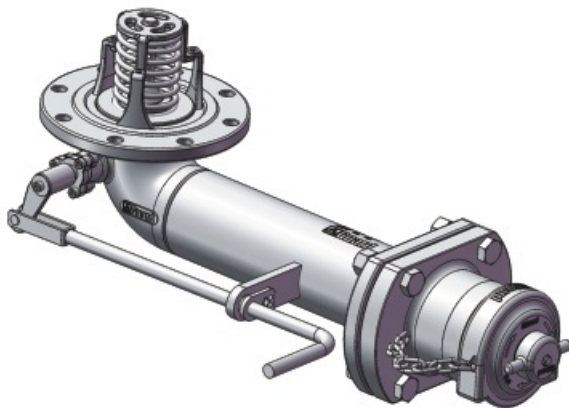

Part No.: HDQ98002-00

Connection:

Flange drilled 8× $\phi 14 \times$ PCD177.8

Outlet: Dry Coupler DN65

Nominal Pressure: 6Bar

Contact Parts: 316

Fitted with FEPISilicon Encapsulated O-Ring

Fitting Details

