


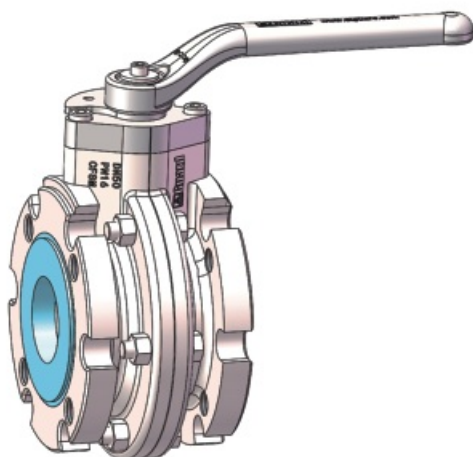

2" PFA Lined Ball Valve - left open or right open with lead seal hole. Adopt one-piece ball stem design, with double sealing effect, series ball valve can be manually or add actuator, the lining layer adopts soluble PTFE high-purity raw materials, with excellent corrosion resistance, high (low) temperature resistance, non-adhesive and electrical insulation, can resist the corrosion of various strong acids, strong alkalis, strong oxidants. It has the advantages of quick and convenient opening and closing, and small opening and closing force; the shorter connection size can be suitable for various occasions.

Part No.: QAFA5001-00

Connection:

Container Flange 4 × 5/8-11UNC × PCD120.6

Outlet 4 × 5/8-11UNC × PCD120.6

Nominal Diameter: 50mm


MAWP: 16Bar

Design Temperature: - 40°C ~ + 200°C


Contact Parts: 316/PFA

Seal: PTFE

Fitting Details

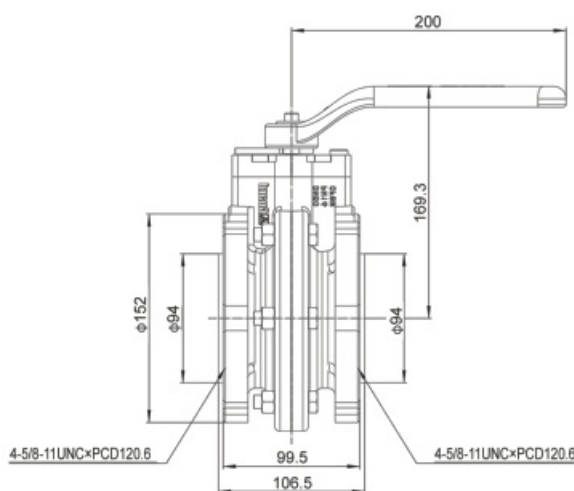

Part Drawing

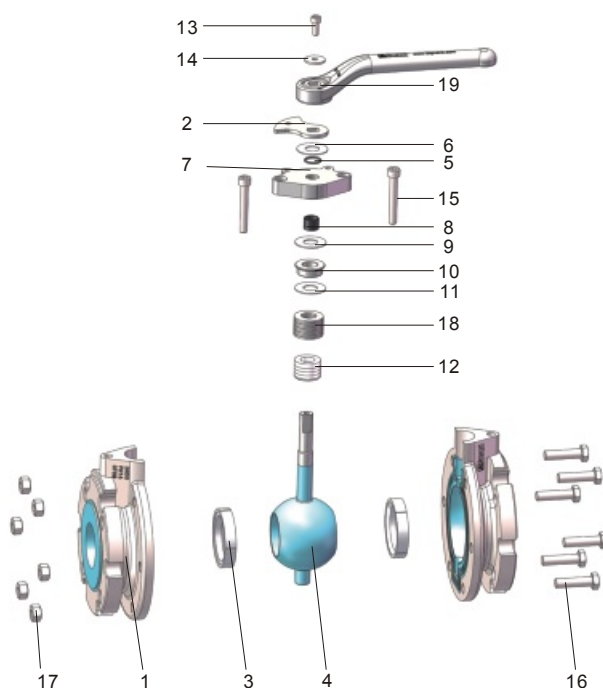

Item	Part No.	Description
1	QAFA5001-01	Body
2	QAFA5001-02	locating plate
3	QAFA5001-03	Valve Seat
4	QAFA5001-04	Ball
5	QAFA5001-05	O-Ring
6	QAFA5001-06	PTFE Washer
7	QAFA5001-07	Rhombic gland
8	QAFA5001-08	Self-lubricating Bearing
9	QAFA5001-09	Washer
10	QAFA5001-10	Junk Ring
11	QAFA5001-11	Washer
12	QAFA5001-12	Packing
13	85988100M6*16	Capscrew
14	859821006	Gasket
15	85988100M8*55	Capscrew
16	85983500M10*40	Bolt
17	85984400M10	Nut
18	QAFA5001-13	Spring
19	QAFA5001-14	Handle