

DN500 Polished Manlid Assembly-8 Points.

All the parts inside the manlid component that come into contact with the medium are mirror-polished, suitable for storing and transporting food-grade or other media with special requirements. The polished inner wall ensures the purity of the medium, reduces residual medium on the inner wall, and facilitates cleaning.

Stainless steel swing bolt with and hexagonal nuts. With customs lead seals, seal sold separately.

Option - Manlid blind cover, without threaded seat


Option-The maximum opening angle is standard 135° and optional 120° .

Fitting Details




Part No.: R1583701-00
 Nominal Diameter: 500mm
 Design Pressure: 4Bar(58PSI)
 Test Pressure: 6Bar(87PSI)
 Points: 8
 Design Temperature: - 40°C ~ + 200°C
 Weight: 19kg
 Neckring Weight: 7kg

Temperature range depends on the seal

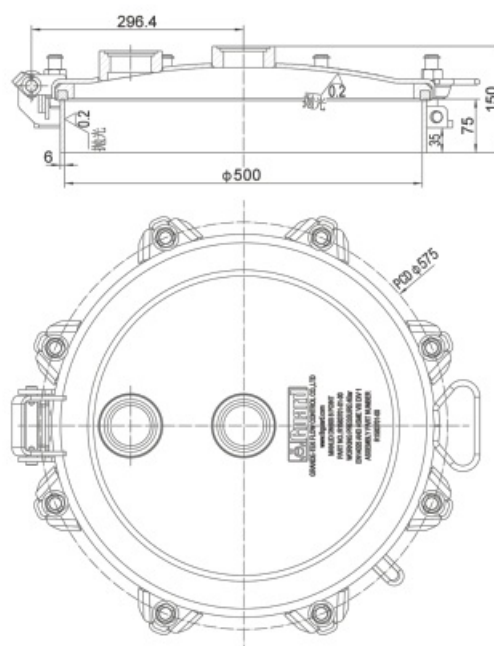

Part Drawing

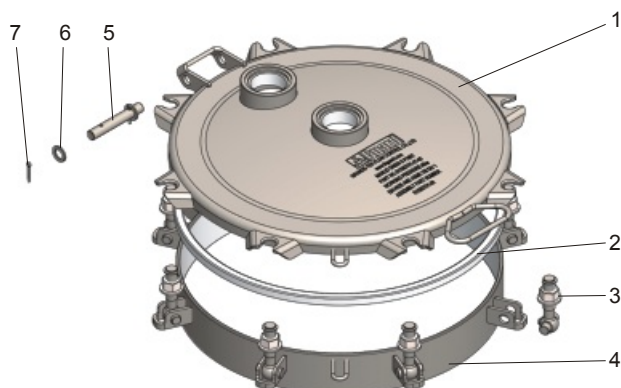

Item	Part No.	Description
1	R1583701-01-00	DN500 Cover
2	见密封件数据表	Seal
3	RL188701-00	Bolt Assembly
4	R1583702-02-00	DN500 Neckring
5	R4583A01-03	Hinge Pin
6	R4583A01-12	Gasket
7	859960004*25	Split Pin