




DN500 With stands 4Bar Pressure Manlid Assembly, when using PTFE coated EPDM seal ring, bolt locking torque up to 90N.m, pressure resistant 4Bar (25°C). It is suitable for the tank car whose detection pressure is 4Bar.

Standard M16 stainless steel swing bolt assembly;

The gasket is provided separately;

Fitting Details

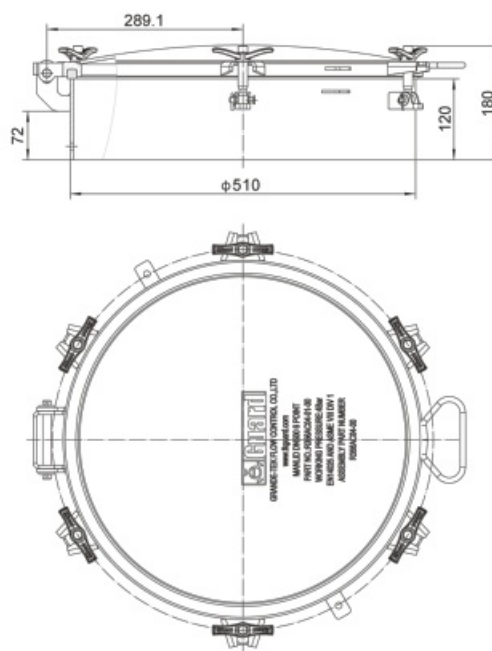

Part No.: R356AC04-00

Nominal Diameter: 500mm

Text Pressure: 4Bar(58PSI)

Points: 6

Design Temperature: - 40°C ~ + 200°C

Cover Weight: 13.5kg

Neckring Weight: 8kg

Temperature range depends on the seal.

Neckring profiled to suit tank radius.

Part Drawing



Item	Part No.	Description
1	R356AC04-01-00	Manlid Cover
2	See Seal Data	Seal(Sold Separately)
3	RL169001-00	Swingbolt Assembly
4	R356AC04-02-00	Neckring
5	0250A001-03	Hinge Pin
6	8598100012	Washer
7	859860003.2*20	Split Pin