

DN500 Welded Flange Deep Neckring Assembly-8 Points. The flange is welded inside the assembly. The flange is used to install the charging valve and other valve parts. Double safety seal.

Internal welded flange neckring are available with variety Guard DN500 manlid covers.

Stainless steel swing bolt with stainless steel nut or brass handnuts. With customs lead seals, seal sold separately.


Option-The maximum opening angle is standard 135° and optional 120° .




Part No.: R4583A86-00
 Nominal Diameter: 500mm
 Design Pressure: 4Bar(58PSI)
 Test Pressure: 6Bar(87PSI)
 Points: 8
 Design Temperature: - 40°C ~ + 200°C
 Weight: 104kg

Temperature range depends on the seal

Fitting Details

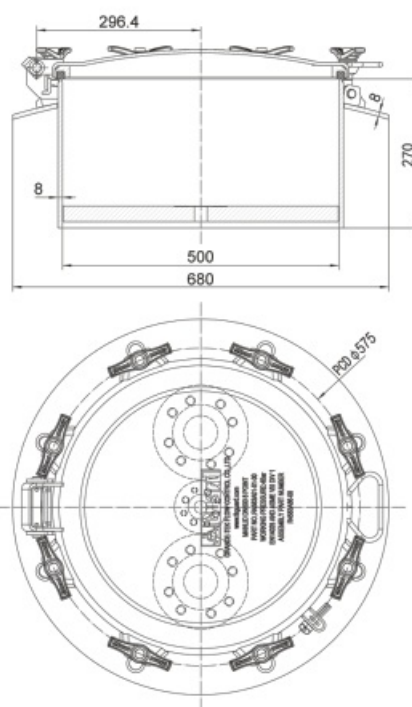

Part Drawing

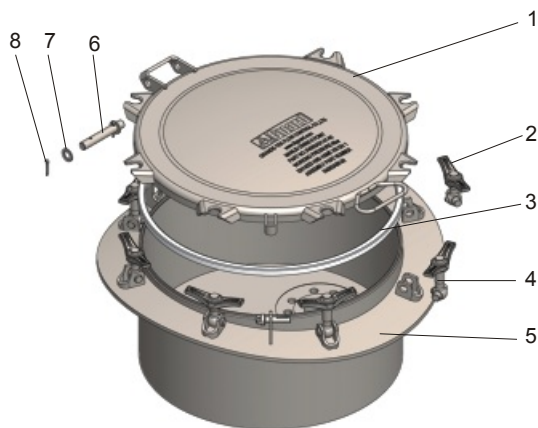

Item	Part No.	Description
1	R4583A01-01-00	DN500 Cover
2	R4583A01-14-00	Bolt Assembly
3	见密封件数据表	Seal
4	R4583A01-13-00	Bolt Assembly
5	R4583A86-01-00	DN500 Neckring
6	R4583A01-03	Hinge Pin
7	R4583A01-12	Gasket
8	859960004*25	Split Pin