


DN500 Plastic Coated Flange Manlid Assembly -20 points . The manlid is suitable for tanks lined with PFA lining (PFA lining thickness of 3mm). The manlid cover is lined with the medium contact part, and the valve installation flange is welded on the cover body. Liner size reserved for collar assembly, after welding to tank body and tank body lining. The manlid can also be used for lining other thicknesses up to 3mm.

Standard fasteners. No separate sealing ring is required. Exhaust port selection

Optional - Body mounting flange size according to customer installation requirements

Option - Flanging collar radian is selected according to the pot radian, and the height of the neck cylinder is customized according to the design requirements of the tank

Fitting Details

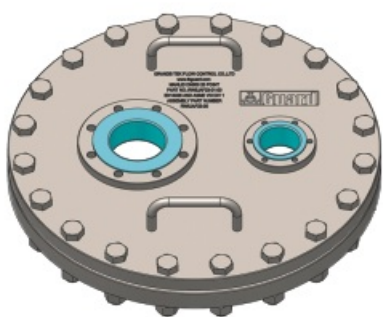

Part No.: RW5JAF23-00

Nominal Diameter: 500mm


Points: 20

Design Temperature: - 40°C ~ + 200°C


Cover Weight: 76.5kg

Neckring Weight: 44.5kg

Temperature range depends on the seal

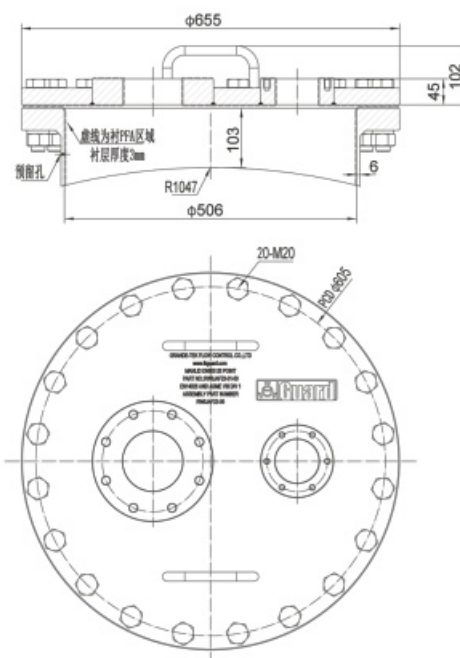

Part Drawing

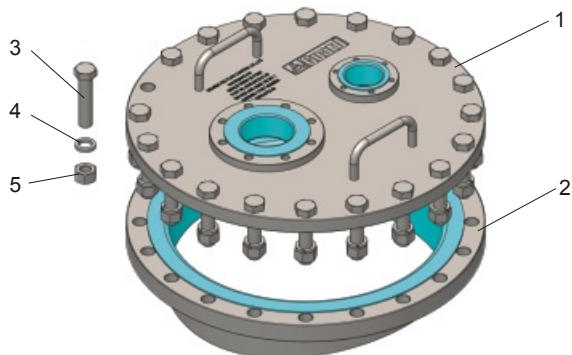

Item	Part No.	Description
1	RW5JAF23-01-00	DN500 Manlid Cover
2	RW5JAF23-02-00	DN500 Manlid Neckring
3	85993300M22*100	Bolt
4	8599110022	Spring Washer
5	85994400M22	Nut