


3" 90° Highlift Manul Foot Valve




3"90° Foot Valve- inlet flange drilled 8 x 14mm holes equi-spaced on a 178mm PCD, outlet flange drilled 4 x 17mm holes equi-spaced on a 160mm PCD fitting with high temperature fusible device and emergency cut-off device. Seal parts adopt o-ring as poppet seal. 45°,90° version available.

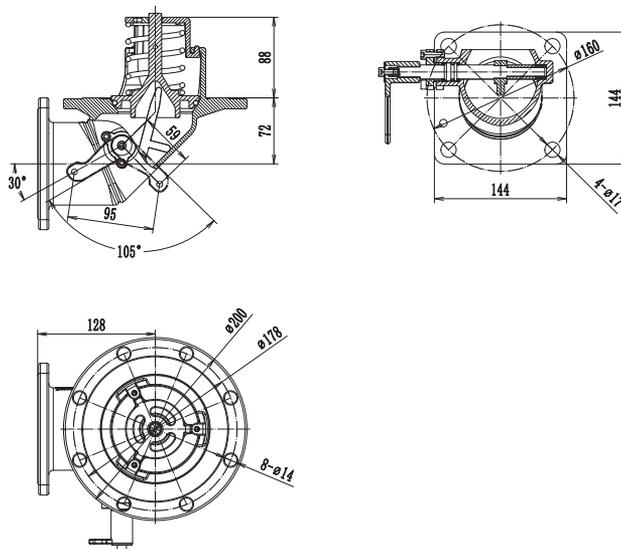

Part No.: JZ968003-00
 Connection: Inlet Flange 8 x φ 14 x PCD178
 Outlet Flange 4 x φ 17 x PCD160
 Norminal Diameter: 80mm
 Norminal Pressure: 6Bar
 Design Temperature: -40°C ~ 200°C
 Contact Part: 316
 Seal: PTFE、FEP+Silicon
 Weight: 6.7kg

Part Drawing

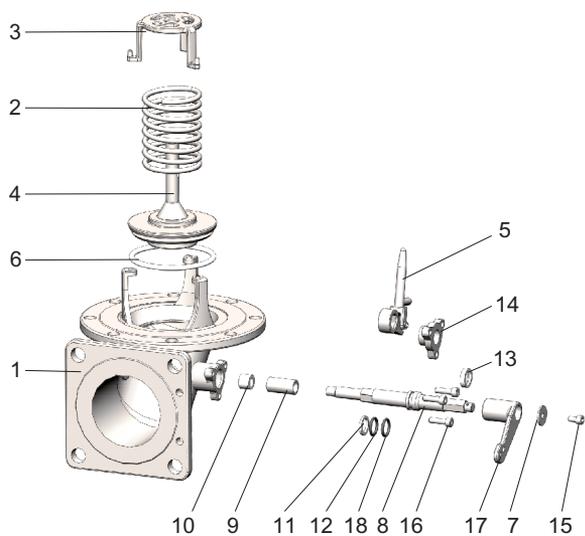

Item	Part No.	Description	Seal Kit (※) Maintenance Kit (☆)
1	JZ968001-01	Body	
2	JS468001-03	Spring	☆
3	JS468002-04	Spring Top Plate	☆
4	JS468001-02	45° Solid Poppet	☆
5	JS468001-06-00	Crank Block Assembly	☆
6	JS468001-05	81.92*5.33 O-ring	※
7	GB/T5287	Washer	☆
8	JZ964C01-10	Spindle	☆
9	JS468001-13	Location Tube	☆
10	JS468001-14	Bush	☆
11	JS468001-09	Spindle Seal	※☆
12	JS468001-10	15.54*2.62 O-ring	※☆
13	JS468001-11	Spindle Seal	※☆
14	JS368001-08	Stuffing Clamp	☆
15	GB/T70.1-2000	M6*10 Screw	
16	GB/T70.1-2000	M6*20 Screw	
17	JZ964C01-07	Crank Arm	☆
18	DLJ68001-17	13.4*3 O-ring	※☆

Seal kits: SNSJ8001, Mateniance kit : SNMJ8004