



DN50 Flanged LPG Ball Valve - Inlet flange is $4 \times \phi 18$ on the PCD125mm flange, outlet flange is $4 \times \phi 18$, the main seal is made of PTFE sealing ring, the product can choose DN25, DN50 two specifications, the connection mode can choose RF surface or concave and convex surface.

Fitting Details

Part No.: QP5C5003-00

Connection :

Inlet Flange: $4 \times \phi 18 \times \text{PCD}125$

Outlet Flange: $4 \times \phi 18 \times \text{PCD}125$


Nominal Diameter: 38mm

Nominal Pressure: PN25


Design Temperature: $-40^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Contact Parts: 316

Seal: PTFE

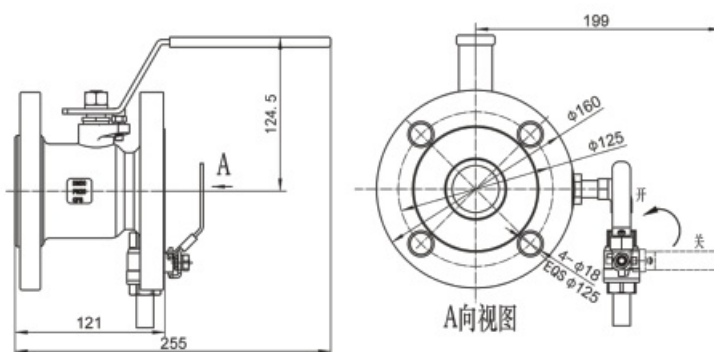

Part Drawing

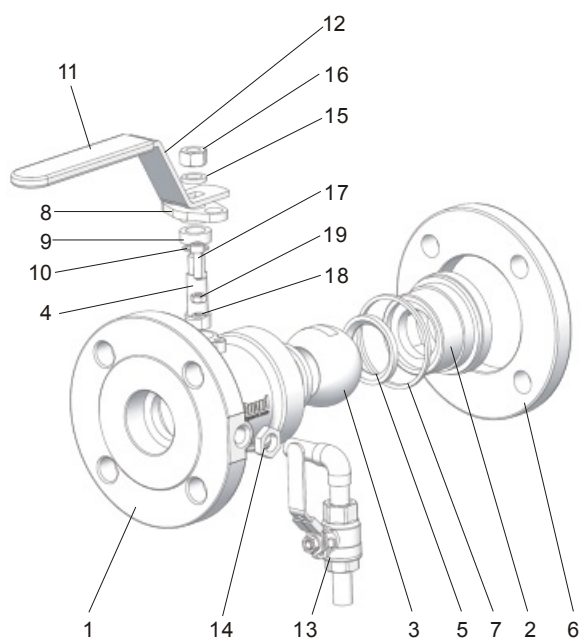

序号 Item	零件图号 Part No.	零件名称 Description
1	QP5C5003-01	Body
2	QP5C5001-02	Plug
3	QP5C5001-03	Valve Ball
4	QP5C5001-04	Spindle
5	QP5C5001-05	Ball Seat
6	QP5C5001-06	Threaded Flange
7	QP5C5001-07	Blockbuster
8	QP5C5001-08	Gland
9	QP5C5001-09	Packing
10	QP5C5001-10	Tablet
11	QP5C5001-11	Handle Grip
12	QP5C5003-02	Handle
13	QP5C5001-13-00	Weld Assembly
14	GB6173	Nut
15	GB/T93	Gasket
16	DIN934	Nut
17	GB/T 70.3	Bolt
18	GB/T93	Gasket
19	DIN934	Nut